

SF-VI111-IPW-1MF

WiFi IP Video Door Station


2 MP Camera | Bidirectional Audio

Opening with Mifare card

Mobile APP with or without Monitor

Power over PoE Standard

Surface mounting

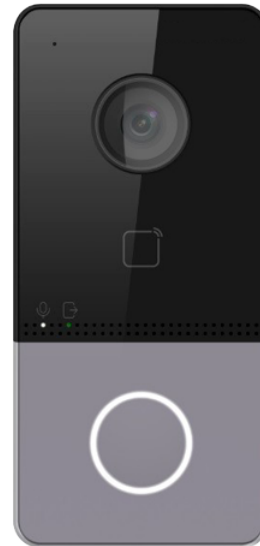

Safire

IP video intercom with 2Mpx camera for 1 apartment

Adjustable wide angle lens

Integrated speaker and microphone

IR night vision

Conexión TCP/IP, WiFi y RS485

PoE IEEE802.3af

Remote monitoring through Safire Control Center-software, mobile app or interior monitor

Remote door opening

Surface mounting

Specifications

Brand	Safire
Operating system	LINUX OS
Image sensor	1/3" 2 Megapixel CMOS Wide Angle
Audio	Bidirectional audio with microphone and speaker
Access Control	Door opening with Mifare card 13.65MHz to 256 cards
Keypad	Mechanical call button
Relay	1 for lock control.
Inputs	Exit button, feedback, door sensor, tamper
Remote access	Web browser, phone app or Safire Control Center-software
Network interface	Ethernet 10/100 BaseT / SIP Protocol 2.0 /WiFi
Power	DC 12 V / 1000 mA max. / IEEE802.3af PoE
Degree of protection	IP65
Material	Plastic
Temp. operation	-40° C ~ +53° C
Dimensions	138 (H) x 65 (W) x 27 (D) mm
Weight	265 g